


FLUSH MOUNT KIT MB-69

Thank you for purchasing the **MB-69 FLUSH MOUNT KIT**. The MB-69 is used to mount the IC-M45 VHF MARINE TRANSCEIVER flush to a flat surface such as an instrument panel.

Please read these instructions thoroughly before flush mounting the IC-M45 with the MB-69.


UNPACKING

Clamps 2 sets

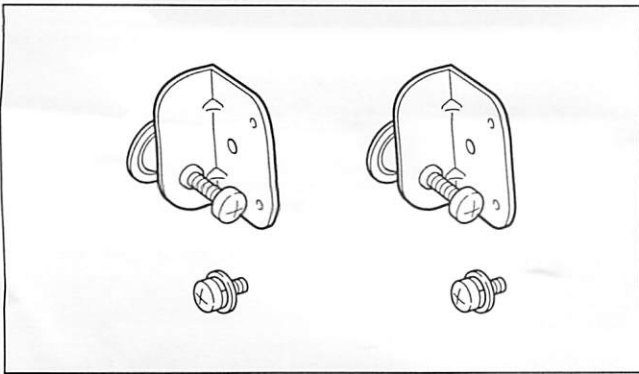


INSTRUCTIONS

- ① Using the template below, carefully cut a hole into the instrument panel (or wherever you plan to mount the transceiver).
- ② Slide the transceiver through the hole, rear panel first.

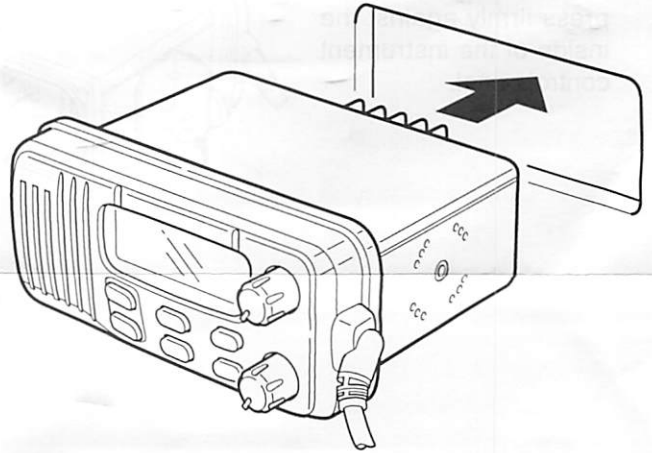


TEMPLATE

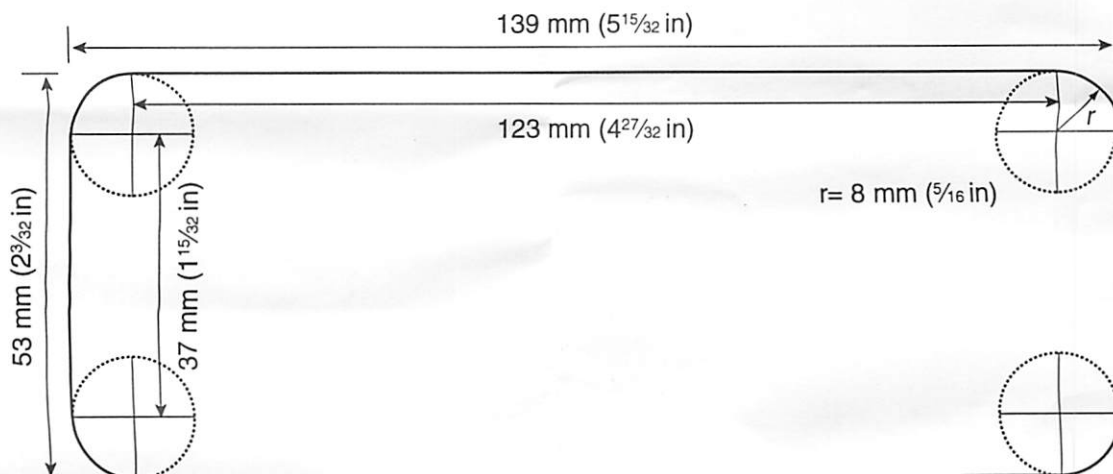


INSTRUCTIONS CONTINUED

- ③ Using the 2 supplied bolts (M5 × 8 mm), attach the clamps on either side of the IC-M45 as shown below.
- Make sure that the clamps align parallel to the IC-M45's body.

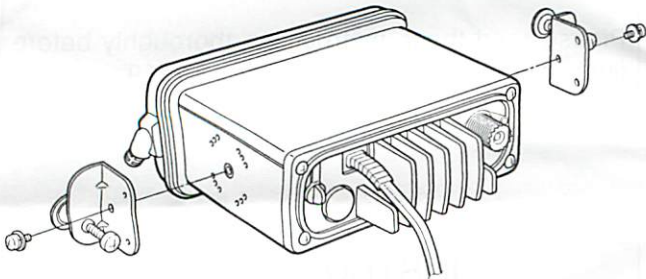


- ⑤ Tighten the locking nuts (rotate counterclockwise) so that the MB-45 is securely mounted in position as below.

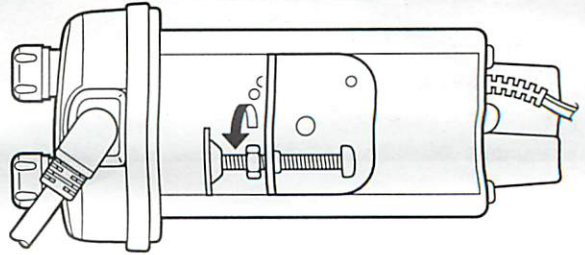

- ⑥ Connect the antenna and power cable, then return the instrument control panel in place.

- ④ Tighten the end bolts on the clamps (rotate clockwise) so that the clamps press firmly against the inside of the instrument control panel.

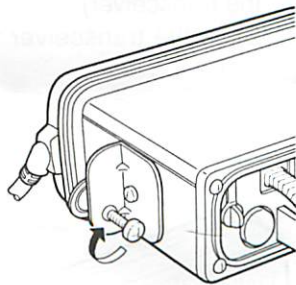

Icom Inc.

1-1-32 Kamiminami, Hirano-ku, Osaka 547-0003 Japan

Count on us!

A-8301D-1EX Printed in Japan
Copyright 1997 by Icom Inc.