




# EASYASSIST 200

## SPEC SHEET

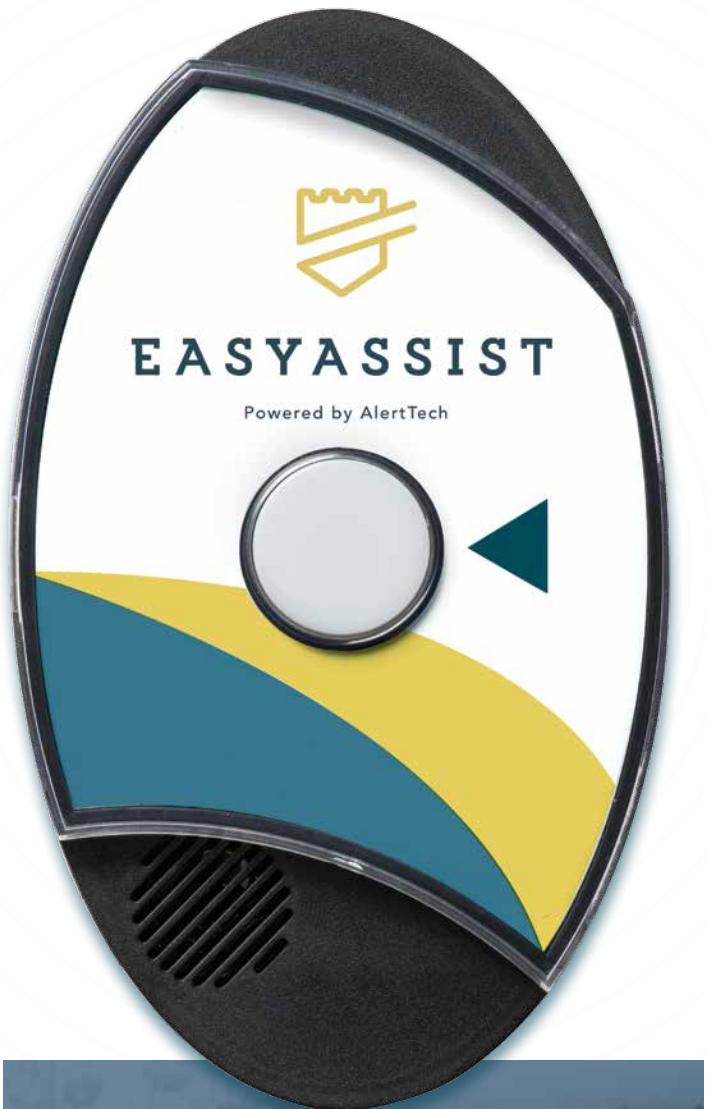

Attractive glowing call button when call is active

Customizable graphic overlays for on-brand / on-message display

High durability enclosure with UV stable construction

Heavy duty wall mounting brackets available

Included heavy duty 3M™ Dual Lock™ reclosable fastener strips (2" x 3")

Adjustable radio and local speaker volumes

Dimensions: 7.61" x 4.56" x 1.52"



User selectable frequencies between 450 - 470 Mhz

CTCSS and DCS full spectrum encoding

Over 100,000 sq/ft coverage (tested in obstructed warehouse)

.6 mile range

Discreet internal antenna



Menu driven LCD programming screen

Customizable local message "Someone will be with you shortly." (10 Seconds)

Customizable radio message "Assistance needed at the back door." (10 Seconds)

Customizable auxiliary radio message – Triggered from any normally open switch with auxiliary interface

Custom message repeats

Custom delays and durations

Menu programming on device or high speed PC programmer available

Interface lockable to prevent tampering



1 year AA lithium-ion batteries at 10 uses per day

6 internal AA batteries mounted in convenient battery sled

Customizable low battery message